


GENERAL NOTES


- GENERAL CONDITIONS OF THE APPLICABLE CONTRACT APPLY TO THIS PROJECT.
- ALL WORK SHALL COMPLY WITH LOCAL BUILDING AND TERRITORIAL AUTHORITY REGULATIONS, THE BUILDING CODE AND BUILDING ACT.
- THE MAIN CONTRACTOR SHALL ARRANGE ALL INSPECTIONS AND TESTS AS SPECIFIED OR REQUIRED BY THE BUILDING CONSENT AND SHALL PAY ALL COSTS AND FEES FOR SAME. THE CONTRACTOR SHALL SECURE ALL BUILDING CONSENTS AND PERMITS (UNLESS OTHERWISE AGREED) AND UPON COMPLETION OF THE PROJECT (PRIOR TO FINAL PAYMENT) DELIVER TO THE OWNER ALL REQUIRED DOCUMENTATION AND CETIFICATIONS FOR OCCUPATION, INCLUDING O&M MATERIAL AND AS-BUILT INFORMATION.
- ALL PLUMBING AND ELECTRICAL WORK SHALL BE PERFORMED BY LICENSED CONTRACTORS. CONTRACTORS SHALL SUBMIT ALL REQUIRED PERMITS, CERTIFICATES, AND SIGN-OFFS TO THE OWNER AND ARCHITECT/ LBP PERSONNEL FOR THEIR RECORDS.
- THE MAIN CONTRACTOR SHALL VERIFY ALL DIMENSIONS, BE FAMILIAR WITH THE EXISTING CONDITIONS, AND BRING ANY DISCREPANCIES TO THE ATTENTION OF THE ARCHITECT/ LBP PERSONNEL PRIOR TO SUBMISSION OF CONSTRUCTION PROPOSAL AND BEFORE BEGINNING WORK. THE DRAWINGS REFLECT CONDITIONS REASONABLY INFERRED FROM THE EXISTING VISIBLE CONDITIONS AND PROVIDE THE INTENT FOR DESIGN, BUT HOWEVER BY THE ARCHITECT. DRAWINGS MAY BE SCALED FOR ESTIMATING PURPOSES AND FOR GENERAL REFERENCE ONLY. FOR ALL OTHER DIMENSIONS OR LOCATIONS CONSULT THE ARCHITECT/ LBP PERSONNEL OR REFER TO DIMENSIONS ON DRAWINGS. VERIFY ALL DIMENSIONS ON SITE.
- THE MAIN CONTRACTOR SHALL LAY OUT ALL WORK AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS FOR TRADES SUCH AS ELECTRICAL, PLUMBING, ETC.
- THE MAIN CONTRACTOR SHALL PROVIDE AND MAINTAIN ACCESS TO SITE AT ALL TIMES AND AS AGREED IN THE CONTRACT.
- THE CONSTRUCTION MANAGER SHALL SECURE THE SITE FROM THE ELEMENTS AND TRESPASS ON A DAILY BASIS AS TO MITIGATE ANY ADVERSE EFFECTS TO THE CONTRACT WORKS AND SITE.
- THE MAIN CONTRACTOR SHALL KEEP THE CONSTRUCTION SITE FREE AND CLEAR OF ALL DEBRIS AND KEEP OUT ALL UNAUTHORIZED PERSONS. UPON COMPLETION OF THE CONTRACT WORKS, THE ENTIRE CONSTRUCTION AREA IS TO BE THOROUGHLY CLEANED AND PREPARED FOR OCCUPANCY BY OWNER. ALL MATERIALS AND DEBRIS RESULTING FROM THE CONTRACTOR'S WORK SHALL BE REMOVED FROM THE SITE AND DISPOSED OF PROPERLY. CARE SHALL BE TAKEN DURING CONSTRUCTION THAT NO DEBRIS OR MATERIALS ARE DEPOSITED IN ANY RIGHT OF WAY OR PUBLIC AREAS.
- THE MAIN CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL EXISTING AND NEW CONDITIONS AND MATERIALS ON THE SITE AS REQUIRED BY THE CONTRACT. ANY DAMAGE CAUSED BY OR DURING THE EXECUTION OF THE WORK IS THE CONTRACTOR'S RESPONSIBILITY AND SHALL BE REPAIRED TO THE OWNER'S SATISFACTION AT THE CONTRACTOR'S EXPENSE.
- NO CUTTING OR DAMAGE TO BUILDING STRUCTURAL COMPONENTS WILL BE ALLOWED WITHOUT WRITTEN AUTHORIZATION FROM THE ARCHITECT/ LBP PERSONNEL.
- ALL UTILITIES SHALL BE CONNECTED TO PROVIDE GAS, ELECTRIC, AND WATER TO ALL EQUIPMENT WHETHER SAID EQUIPMENT IS IN CONTRACT OR NOT. EQUIPMENT SHALL BE GUARANTEED TO FUNCTION PROPERLY UPON COMPLETION.
- MANUFACTURER'S STANDARD SPECIFICATIONS AND MATERIALS APPROVED FOR PROJECT USE ARE HEREBY MADE PART OF THESE NOTES WITH SAME FORCE AND EFFECT AS IF WRITTEN OUT IN FULL HEREIN. ALL APPLIANCES, FIXTURES, EQUIPMENT, HARDWARE, ETC. SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND REQUIREMENTS.
- WRITTEN WORDS TAKE PRECEDENCE OVER DRAWN LINES. LARGE-SCALE DETAILS AND PLANS TAKE PRECEDENCE OVER SMALLER DETAILS AND PLANS. SHOULD A CONFLICT ARRIVE BETWEEN THE SPECIFICATIONS AND DRAWINGS, THE REQUIREMENTS DEEMED MOST STRINGENT SHALL BE USED.
- MINOR DETAILS NOT USUALLY SHOWN OR SPECIFIED BUT NECESSARY FOR PROPER AND ACCEPTABLE CONSTRUCTION, INSTALLATION, OR OPERATION OF ANY PART OF THE CONTRACT WORKS, AS DETERMINED BY THE ARCHITECT/ LBP PERSONNEL, SHALL BE INCLUDED IN THE WORK AS IF IT WERE SPECIFIED OR INDICATED ON THE DRAWINGS.
- ALL ARCHITECTURAL DRAWINGS AND CONSTRUCTION NOTES ARE COMPLIMENTARY. WHAT IS INDICATED AND CALLED FOR BY ONE SHALL BE BINDING AS THOUGH CALLED FOR BY ALL.
- NO DEVIATION FROM THE DRAWINGS OR SPECIFICATIONS OR INTENT OF SAME SHALL BE MADE WITHOUT THE ARCHITECT'S/ LBP PERSONNEL'S WRITTEN APPROVAL.
- ALL GENERAL/ IMPLIED WARRANTIES AND GUARANTEES SHALL TAKE EFFECT FOLLOWING FINAL COMPLETION SIGN-OFF AS PER THE BUILDING ACT 2004. THE MAIN CONTRACTOR SHALL SIGN ALL GUARANTEES AS PROVIDED BY THE OWNER. IMPLIED WARRANTIES AND GUARANTEES SHALL COVER ALL MAIN AND SUB-CONTRACTOR WORKS. ALL DEFECTS DISCOVERED DURING THE 12 MONTH DEFECTS NOTIFICATION PERIOD FOLLOWING FINAL COMPLETION SHALL BE REPAIRED TO THE OWNER'S SATISFACTION AT THE CONTRACTOR'S EXPENSE.
- ALL DIMENSIONS ARE TO FACE OF STUD OR CENTERLINE OF STRUCTURE UNLESS NOTED OTHERWISE (U.N.O).
- DOOR AND WINDOW DETAILS ARE INDICATED ON DOOR AND WINDOW SCHEDULES.
- DOOR AND WINDOW DIMENSIONS ARE TO CENTERLINES OF UNITS, U.N.O.

LEGEND

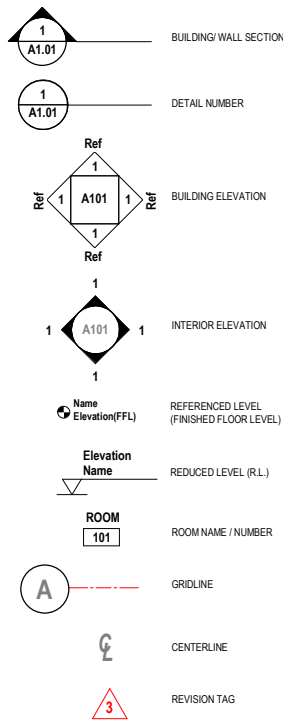


BLDG.	BUILDING
CONC.	CONCRETE
C.J.	CONTROL JOINT
COL.	COLUMN
DET.	DETAIL
DIA.	DIAMETER
DN.	DOWN
EL/ELEV.	ELEVATION
ELEC.	ELECTRICAL
EQ.	EQUAL
FIN.	FINISH
FLR.	FLOOR
GALV.	GALVANISED
PB.	PLASTERBOARD
I.D.	INSIDE DIAMETER
JT.	JOINT
MECH.	MECHANICAL
MIN.	MINIMUM
N.T.S.	NOT TO SCALE
NO.	NUMBER
C.L.	CENTRELINE
R.O.	ROUGH OPENING
O.D	OUTSIDE DIAMETER
U.N.O.	UNLESS NOTED OTHERWISE
REF.	REFERENCE
R.	RISER
R.O.	ROUGH OPENING
RM.	ROOM
S/STL.	STAINLESS STEEL
STRUCT.	STRUCTURAL
SPEC.	SPECIFICATIONS
T.O.	TOP OF (...)
T.O.C.	TOP OF CONCRETE
T.O.F.	TOP OF FRAMING
T.O.S.	TOP OF STEEL
T.O.W.	TOP OF WALL
TR.	TREAD
TYP.	TYPICAL
@	AT
+	AND
BD.	BOARD
A.F.F.L.	ABOVE FINISHED FLOOR LEVEL
U.N.O.	UNLESS NOTED OTHERWISE
C.O.S.	CHECK ON SITE
R.L.	RELATIVE LEVEL

POWER

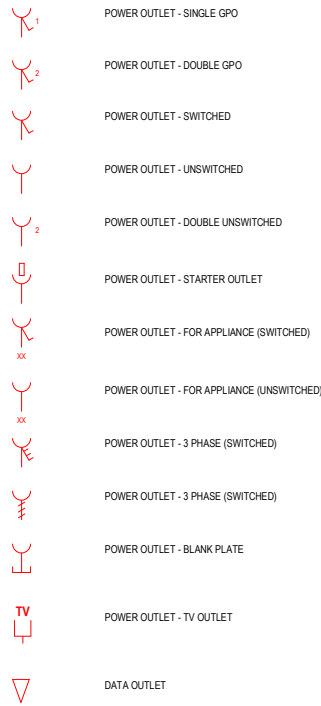


LIGHTING

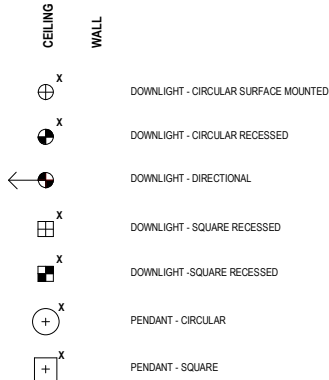

CIRCUITS




SWITCHES

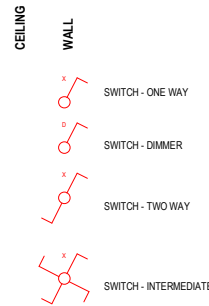

NOTE: "X" DENOTES NO. OF GANGS TO SWITCH

EQUIPMENT

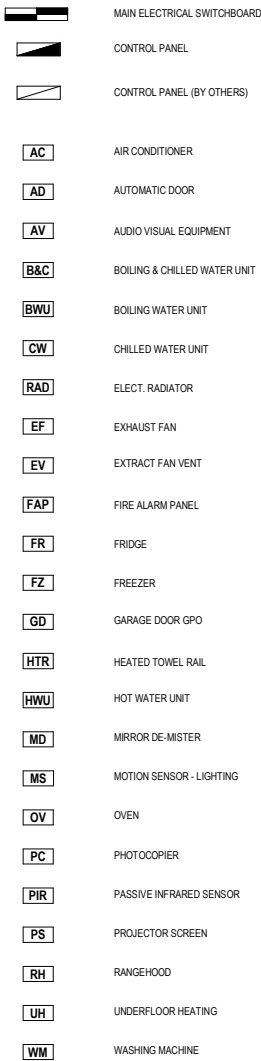

Notes

- Main contractor shall verify all dimensions on site prior to commencing works.
- Do not scale off drawings.
- If in doubt - ask.
- This drawing shall be read in conjunction with all relevant documents.
- Reproduction of the whole or part of this documentation constitutes an infringement of copyright without appropriate permission.

Date

Drawn by Author
Checked by Checker
Scale @ A1 1 : 50

PROJECT NOTES

Sheet No.

A0.01



[INSERT PROJECT ADDRESS]
DETAILED DESIGN

Revisions

29.05.26

Legend

For Review
30/05/2026 11:24:01 pm

Notes


1. Main contractor shall verify all dimensions on site prior to commencing works.
2. Do not scale off drawings.
3. If in doubt - ask.
4. This drawing shall be read in conjunction with all relevant documents.
5. Reproduction of the whole or part of this documentation constitutes an infringement of copyright without appropriate permission.

Date	29.05.26
Drawn by	EF
Checked by	EF
Scale @ A1	1 : 50

FOUNDATION PLAN

Sheet No. _____

A2.00

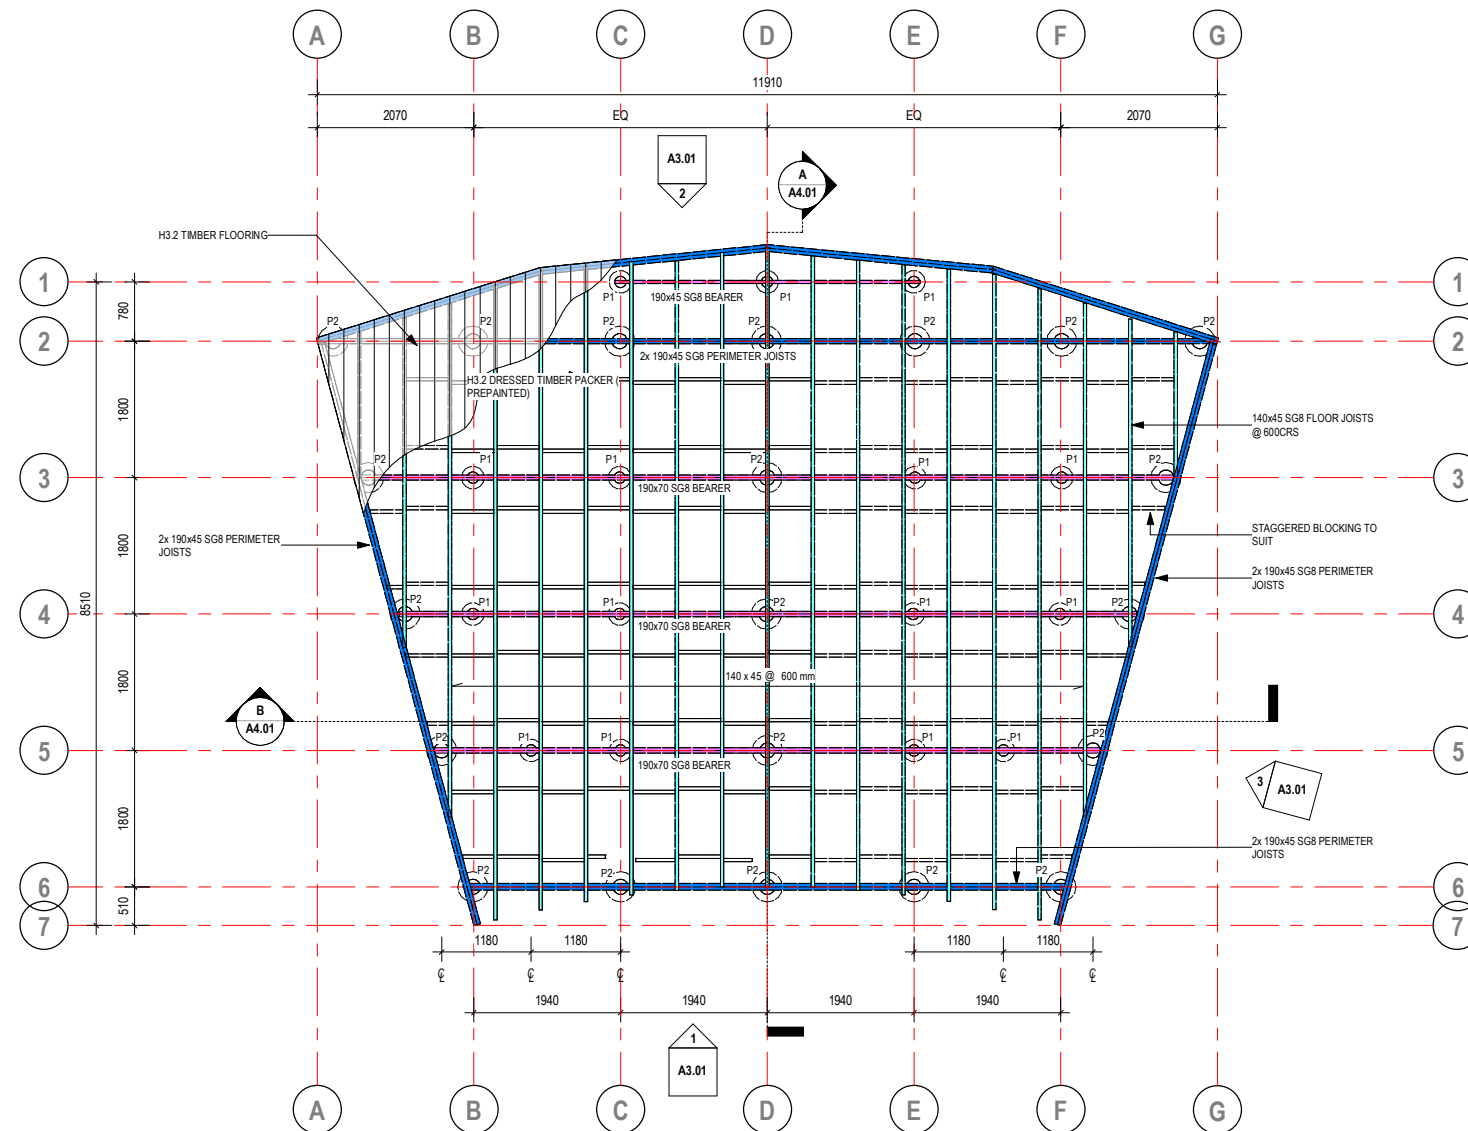

1 SUB-FLOOR/ FOUNDATION PLAN (TYP.)
A3.01 SCALE: 1 : 50

FLOOR PLAN NOTES

DOORS & WINDOWS

ALL EXTERNAL DOORS & WINDOW JOINERY DIMENSIONS ARE DIMENSIONED TO THE OUTSIDE OF THE JOINERY FRAME. ALLOW AN EXTRA 10mm TO PERIMETER FOR ROUGH OPENING SIZE. ALLOW 20mm UNDERCUT TO INTERNAL CLOSED SPACES (I.E. ENSUITE) WITH MECHANICAL VENTILATION. INTERNAL DOORS SHOW DOOR LEAF DIMENSIONS.

STRUCTURAL STEEL

STRUCTURAL STEEL MEMBERS BY STRUCTURAL ENGINEER. REFER STRUCTURAL ENGINEER'S DETAILS AND SPECIFICATIONS FOR CONNECTIONS.

FOUNDATIONS & SUBFLOOR

REFER TO STRUCTURAL ENGINEER'S DRAWINGS AND DOCUMENTATION FOR NEW FLOOR FOUNDATIONS

PLYWOOD FLOORING

19mm H3.1 PLYWOOD FLOORING TO NEW ADDITIONS, SCREWED TO FLOOR JOISTS TO ENSURE SQUEAK FREE SUBSTRATE. COMPLIES WITH B2/AS1 & NZS3602.2003.

DEMOLITION NOTES

- CONTRACTOR TO CONFIRM PRE-REMOVAL INSPECTION OF EXISTING CLADDING WHERE RE-CLADDING WORKS ARE TO BE CARRIED OUT. THIS INSPECTION IS TO BE CARRIED OUT **PRIOR** TO THE REMOVAL OF ANY CLADDING OR ANY REMEDIAL WORKS TO THE EXISTING TIMBER FRAMING, OR STRUCTURE
- TIMBER REMEDIATION WORKS:** CONTRACTOR TO CARRY OUT REMEDIATION WORKS TO TIMBER IN ACCORDANCE WITH **MBIE**. GUIDANCE NOTES: FOLLOWING STRIPPING OF EXISTING CLADDING WHERE REQUIRED, NO WORK IS TO PROCEED UNTIL SUCH TIME THE TERRITORIAL/ BUILDING AUTHORITIES HAVE UNDERTAKEN THE AGREED INSPECTIONS OF THE EXPOSED TIMBER, AND TO CONFIRM EXTENT OF TIMBER REMEDIATION REQUIRED.

NZBC - H1/AS1 Edition 5 COMPLIANCE:

CLIMATE ZONE 3

MINIMUM CONSTRUCTION R-VALUES:

FLOOR (OTHER):	tbc
WALLS:	tbc
ROOF:	tbc
GLAZING (DOORS/WINDOWS):	tbc

MINIMUM INSULATION R-VALUES FOR THE PROPOSED CONSTRUCTION

CEILING ASSEMBLY tbc:


EXTERNAL WALL ASSEMBLY tbc:

TIMBER FLOOR ASSEMBLY tbc:

GLAZING (DOORS/WINDOWS) tbc:


REFER TO H1 REPORT FOR CALCULATIONS

KEYNOTE LEGEND (BY SHEET)

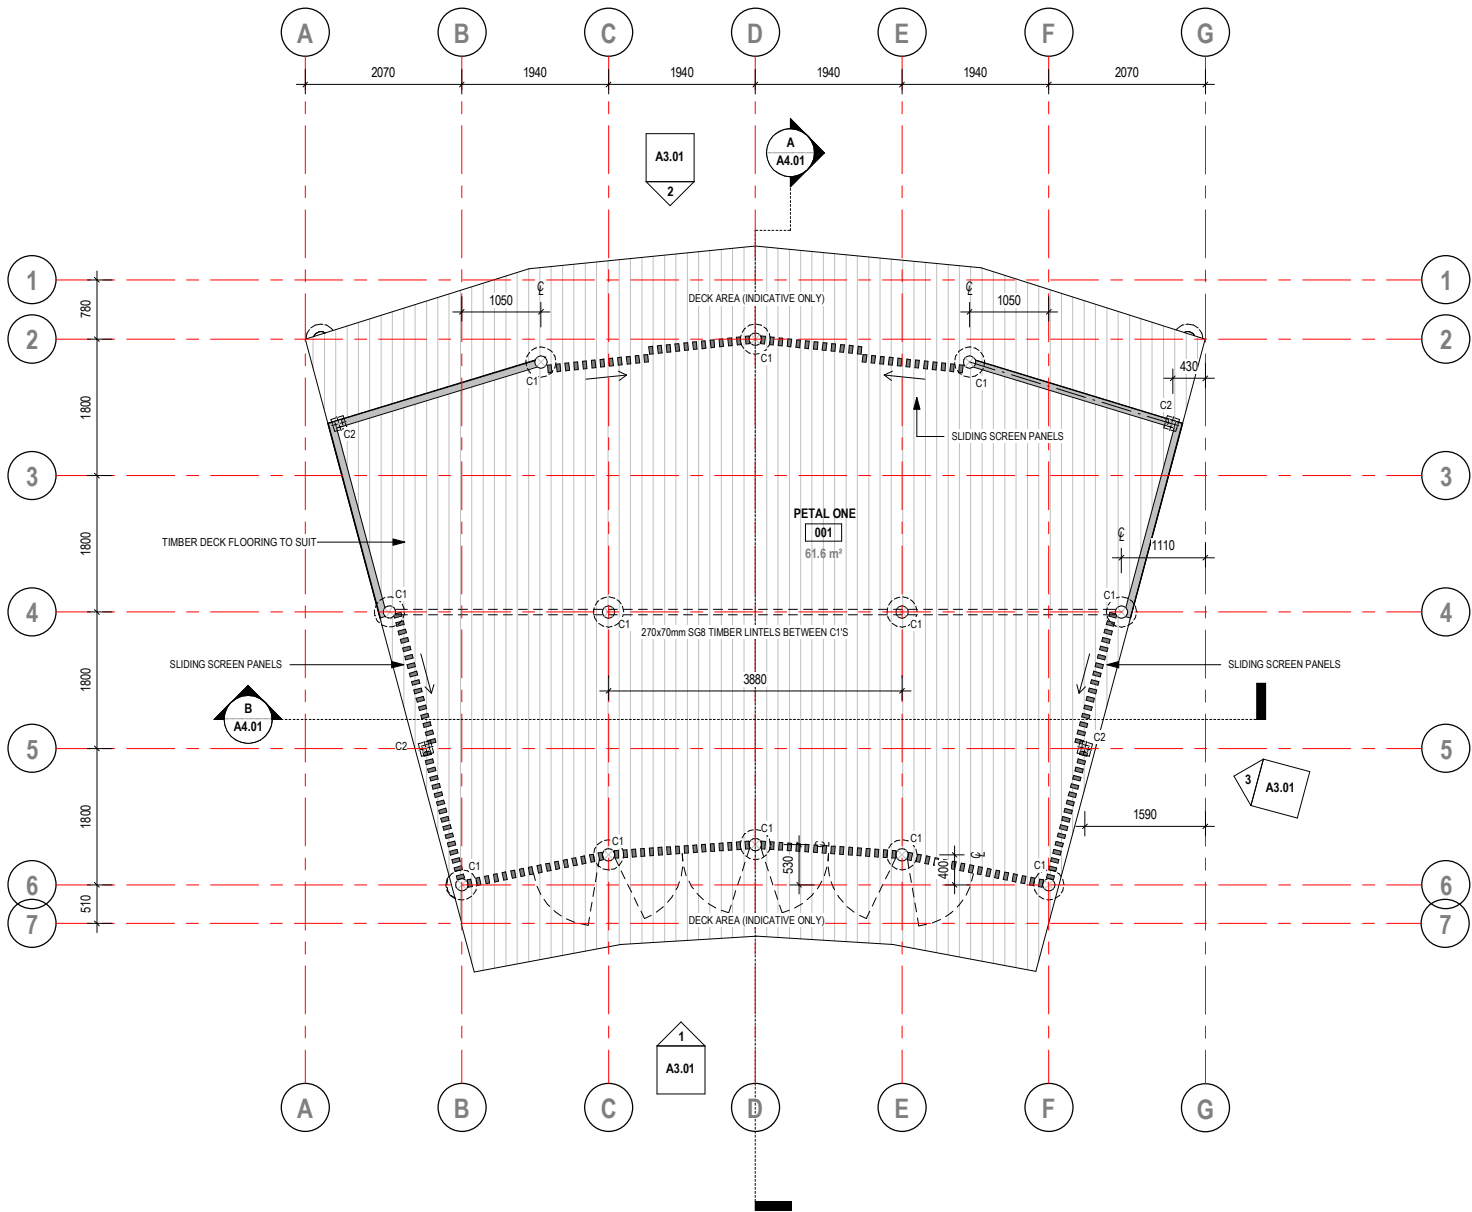

For Review

30/05/2026 11:24:01 pm

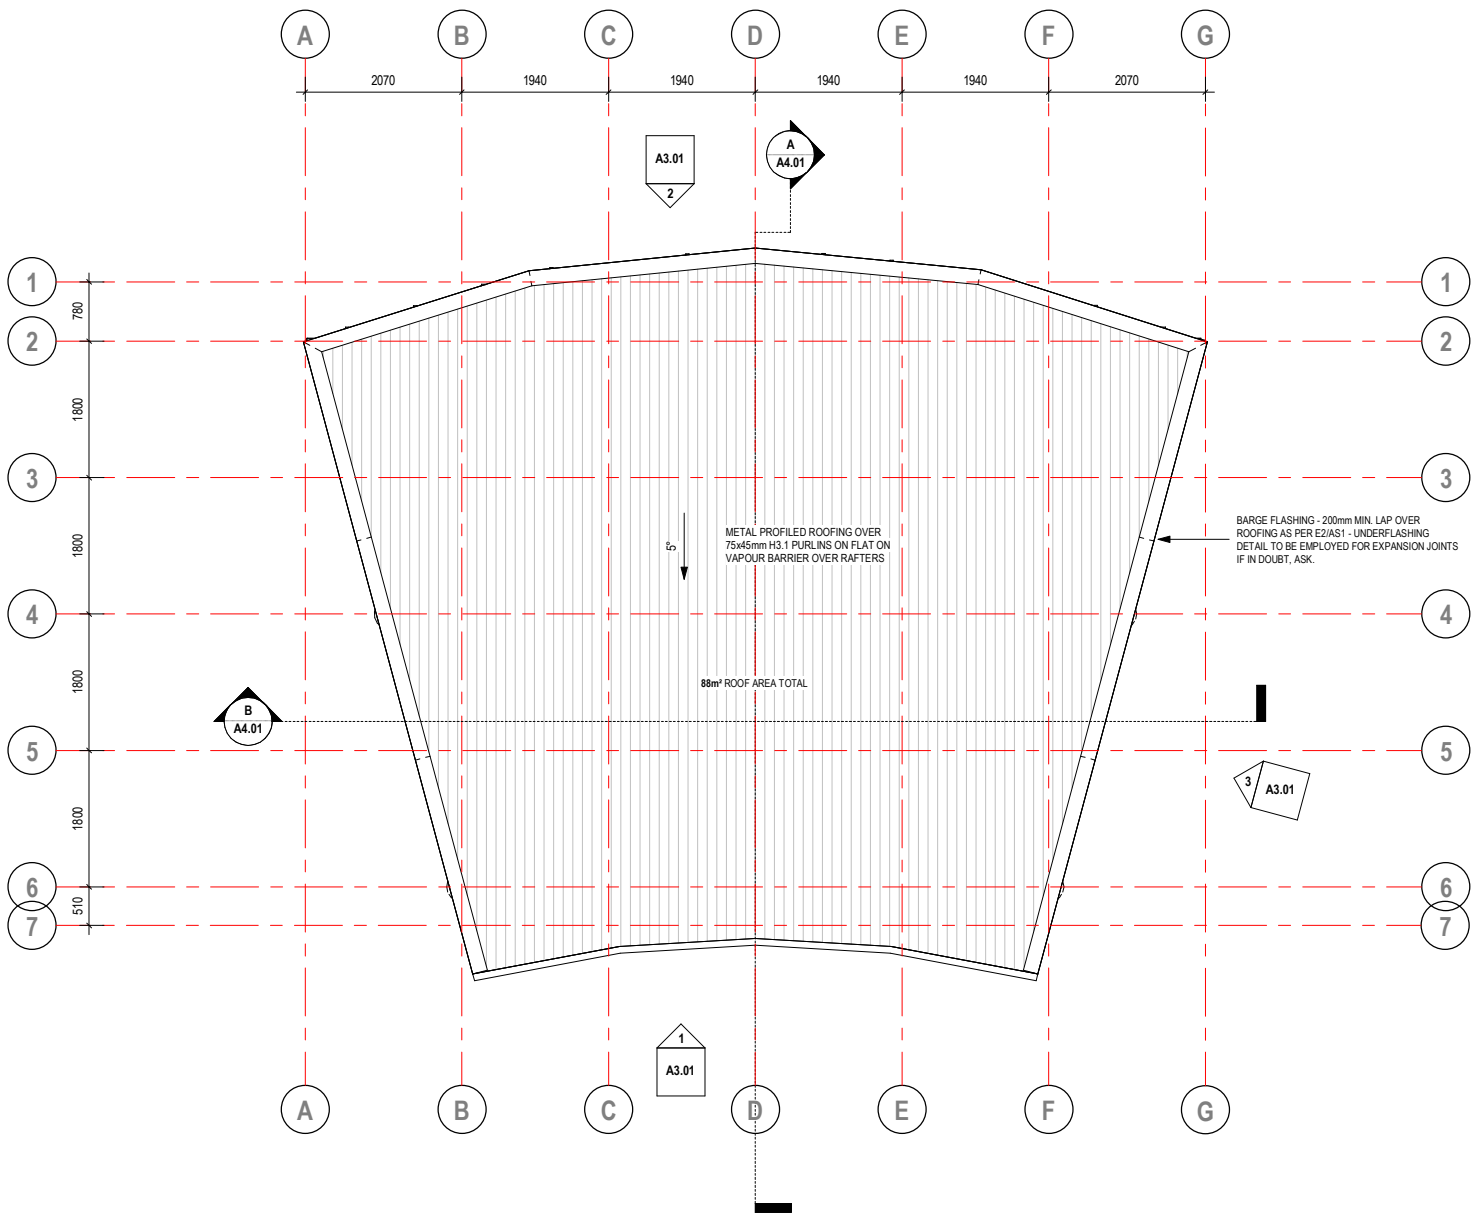

1 ROOF PLAN
A3.01 SCALE: 1 : 50

ROOF PLAN NOTES:

- REFER TO CONSTRUCTION DETAILS FOR FLASHING DIMENSIONS
- ALL ROOF FRAMING TO BE SG8 MINIMUM U.N.O.
- ROOF RAFTER FIXING TYPE F: 2/ 90x3.15 SKEW NAILS + STRAP FIXING (REFER TABLE 10.1 & FIGURE 10.6 NZS 3604:2011)
- SKILLION ROOF RAFTERS SHALL BE SEATED TO TOP PLATES IN COMPLIANCE WITH NZS 3604 FIGURES 10.4 & 10.7.
- SKILLION/ TOP PLATE CONNECTION TO BE NAIL STRAP FIXING EACH SIDE OF RAFTER WITH 8 No. 30x3.15 NAILS EACH STRAP (4 No. NAILS TO TOP PLATE AND 4 No. NAILS TO RAFTER) OR OTHER APPROVED 7kN CONNECTION - REFER NZS3604 FIGURE 10.6
- ROOF PURLINS 70x45mm TIMBER SG8 ON FLAT - 900mm MAX SPAN x 900mm SPACING AND FIXING TYPE U (1/ 14g SELF-DRILLING TYPE 17 SCREW, 100mm LONG @ 5.5kN FIXING CAPACITY IN COMPLIANCE WITH NZS 3604 TABLE 10.10

ROOF FRAMING NOTES

ROOF PLANE BRACING

NOT REQUIRED - CEILING DIAPHRAGM

TIMBER PURLINS

H1.2 70x45 PURLINS @900CRS MAX. ON FLAT SPAN AS PER E2/AS1, TABLE 11

METAL CEILING BATTENS

N/A

ROOF CATCHMENTS AREA

PROPOSED ROOF CATCHMENTS AREA = 88m²

DOWNPIPES & GUTTER SIZING:

ROOF PLAN NOTES:

- REFER TO CONSTRUCTION DETAILS FOR FLASHING DIMENSIONS
- ALL ROOF FRAMING TO BE SG8 MINIMUM U.N.O.
- ROOF RAFTER FIXING TYPE F: 2/ 90x3.15 SKEW NAILS + STRAP FIXING (REFER TABLE 10.1 & FIGURE 10.6 NZS 3604:2011)
- SKILLION ROOF RAFTERS SHALL BE SEATED TO TOP PLATES IN COMPLIANCE WITH NZS 3604 FIGURES 10.4 & 10.7.
- SKILLION/ TOP PLATE CONNECTION TO BE NAIL STRAP FIXING EACH SIDE OF RAFTER WITH 8 No. 30x3.15 NAILS EACH STRAP (4 No. NAILS TO TOP PLATE AND 4 No. NAILS TO RAFTER) OR OTHER APPROVED 7kN CONNECTION - REFER NZS3604 FIGURE 10.6
- ROOF PURLINS 70x45mm TIMBER SG8 ON FLAT - 900mm MAX SPAN x 900mm SPACING AND FIXING TYPE U (1) 14g SELF-DRILLING TYPE 17 SCREW, 100mm LONG @ 5.5kN FIXING CAPACITY IN COMPLIANCE WITH NZS 3604 TABLE 10.10

ROOF FRAMING NOTES

ROOF PLANE BRACING

NOT REQUIRED - CEILING DIAPHRAGM

TIMBER PURLINS

H1.2 70x45 PURLINS @900CRS MAX. ON FLAT SPAN AS PER E2/AS1, TABLE 11

METAL CEILING BATTENS

N/A

THE FRAMING LAYOUT IS DIAGRAMMATIC ONLY. THE CONTRACTOR MUST CONFIRM THE EXACT AMOUNT OF FRAMING REQUIRED ON SITE. ALL WALL FRAMING & FIXINGS TO COMPLY WITH NZS 3604:2011. STUDS ARE GENERALLY 140x45mm IN ACCORDANCE WITH SPECIFIC ENGINEERING DESIGN (REFER ENGINEER'S DWGS). FOR EXTERIOR WALLS PROVIDE WOGS @ 500mm CRS AS REQUIRED FOR 'ECO1' TERRACOTTA RAINSCREEN, OR IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATION. DOUBLE STUDS (MINIMUM) SHALL BE USED AT ALL LOAD POINTS. PURLINS TYPICALLY ON FLAT 70x45mm @ 700MM CRS (CHECK PLANS).

TREATMENT

ALL WALL FRAMING TO COMPLY WITH NZBC B2 / AS1 & NZS 3602:2003 TABLES 1 & 2, AND HAVE FUNGICIDAL TREATMENT. ALL PURLINS AND RAFTERS TO BE H1.2 TREATED.

INSULATION

ALL ROOF, CEILING & EXTERIOR WALL CAVITIES TO BE INSULATED. SEE KEYNOTES 'I' (INSULATION) SERIES.

ENGINEERING

REFER TO ENGINEER'S PLANS FOR ALL STRUCTURAL ELEMENTS AND FOR EXACT BEAM SIZES, LOCATIONS, SPECIFICATIONS AND DETAILS.

BRACING

NOT REQUIRED W CEILING FIXED DIRECTLY TO UNDERSIDE OF RAFTERS AS PER NZS 3604

INTERIOR LININGS

PLY BB GRADE FINISH H3.1 MIN. TREATMENT - TBC BY CLIENT


PLUMBING & DRAINAGE

N/A


CEILING BATTENS

DIRECT FIXED TO RAFTERS


WIND ZONE

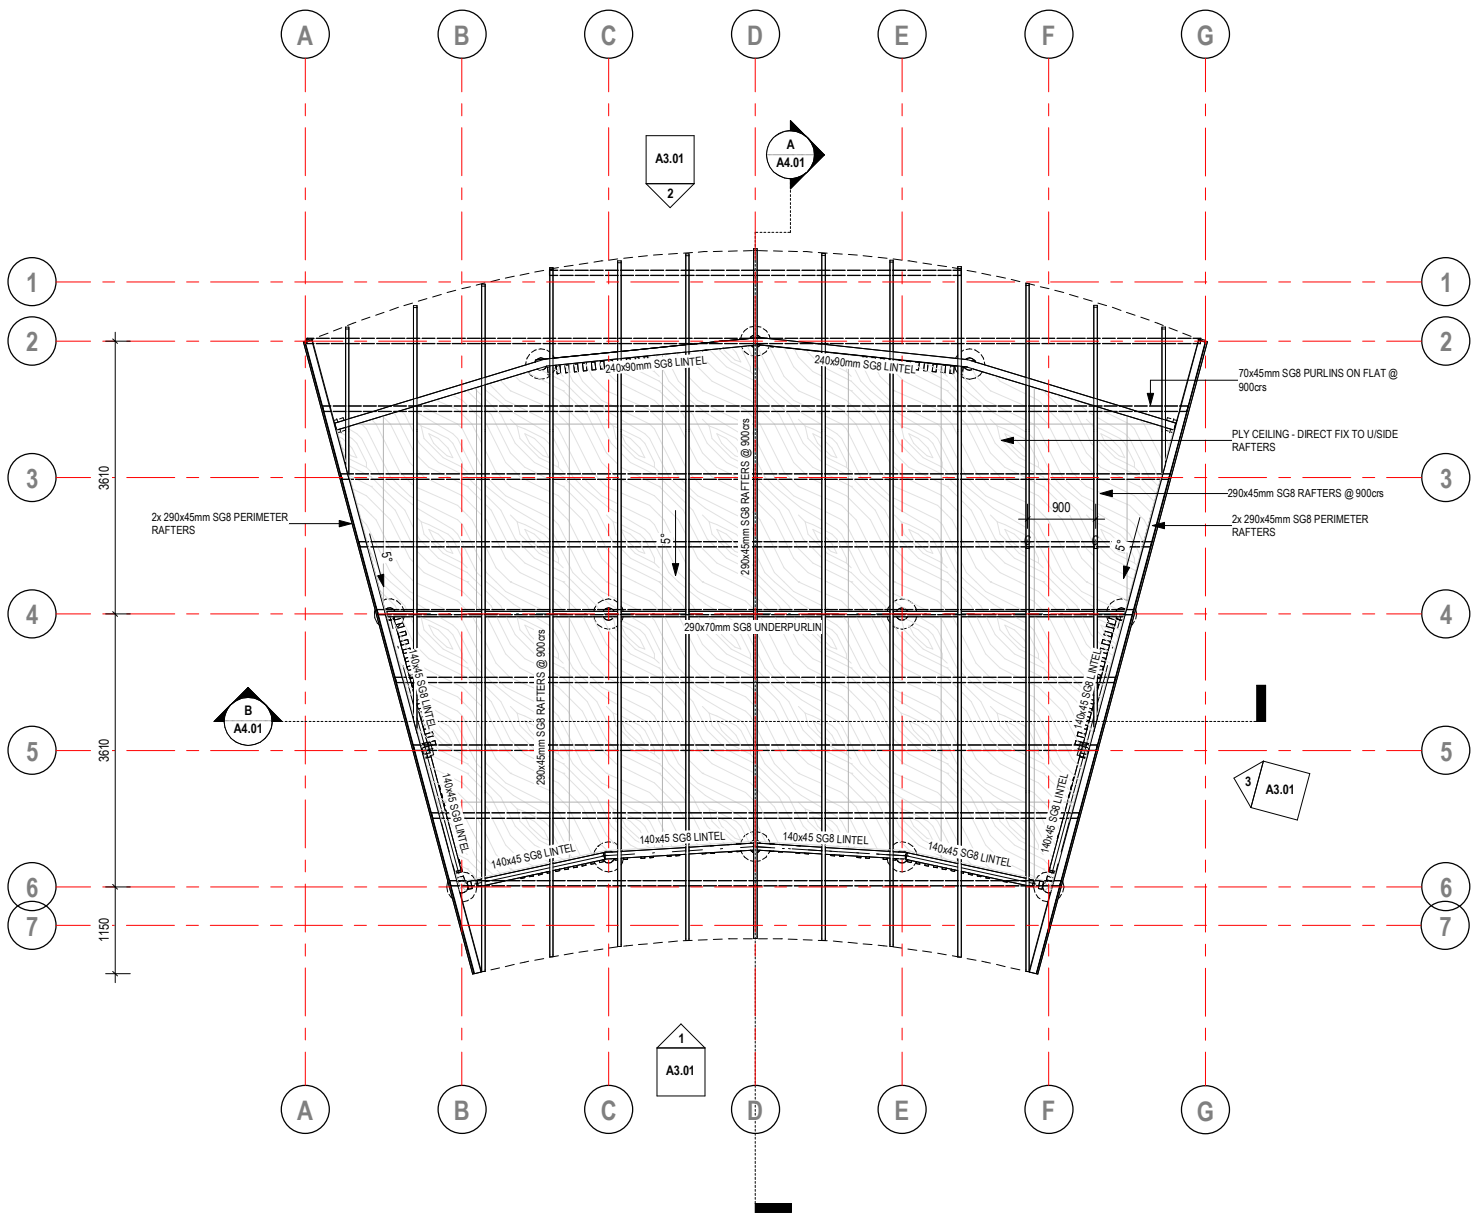


1 ROOF FRAMING PLAN
A3.01 SCALE: 1 : 50

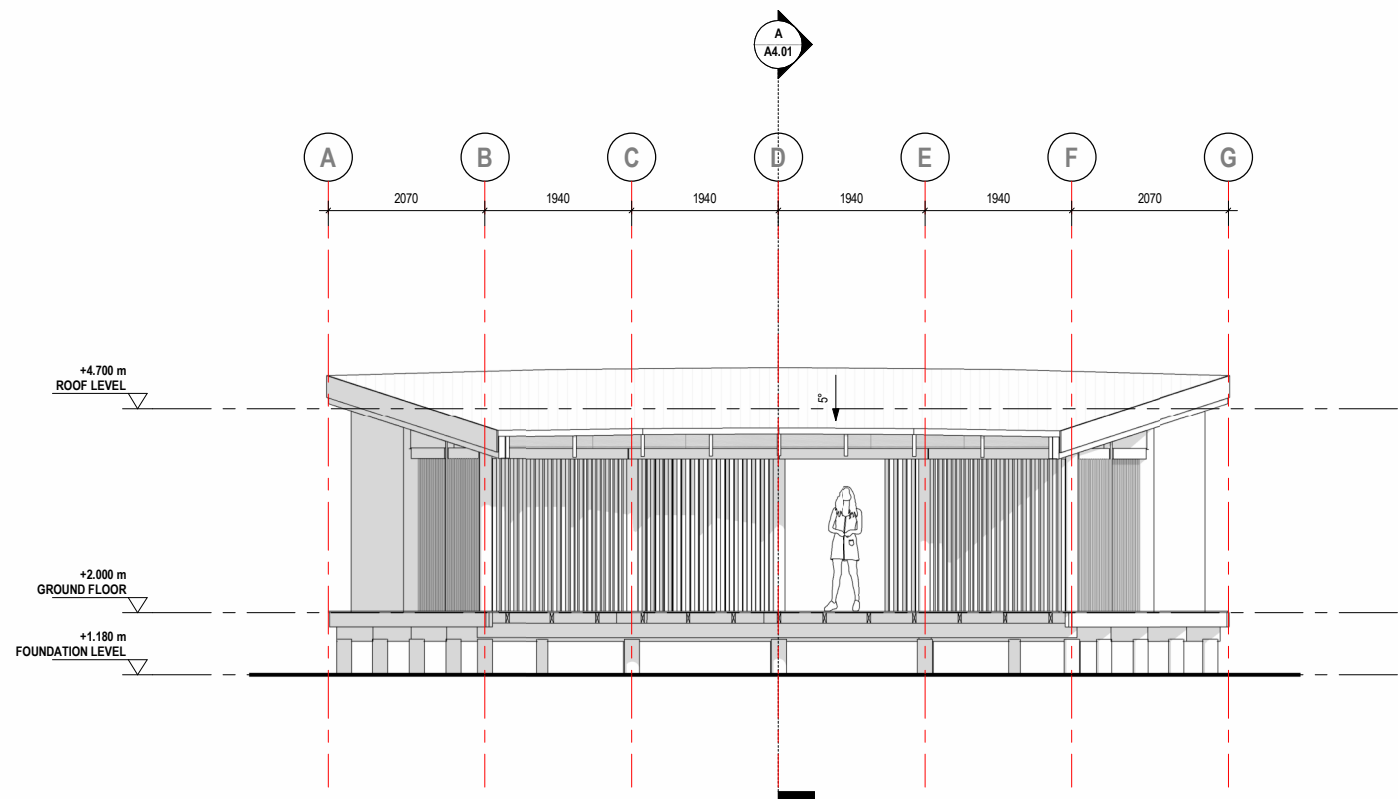


1 FRONT ELEVATION
SCALE: 1 : 50

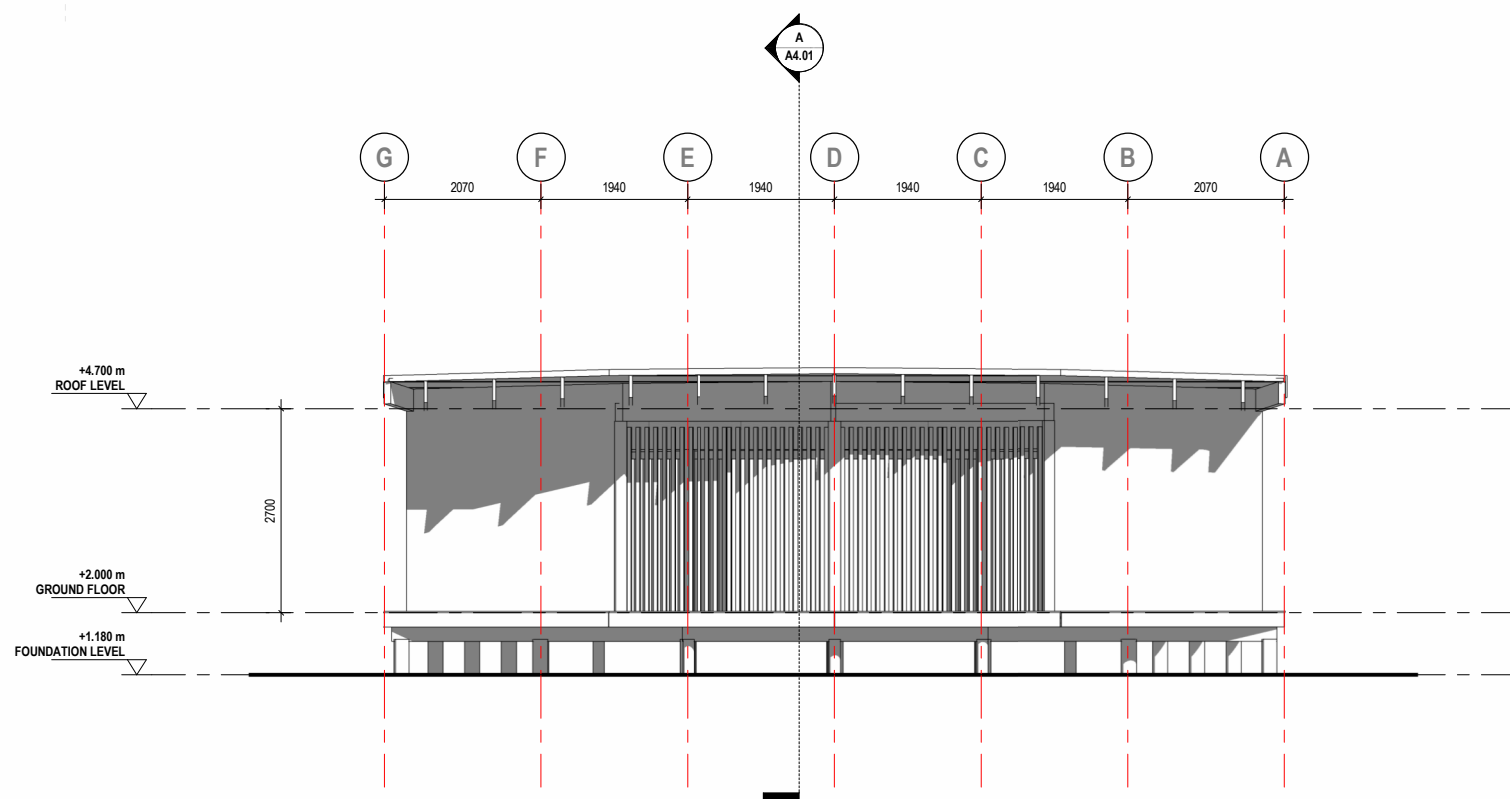


2 REAR ELEVATION
SCALE: 1 : 50

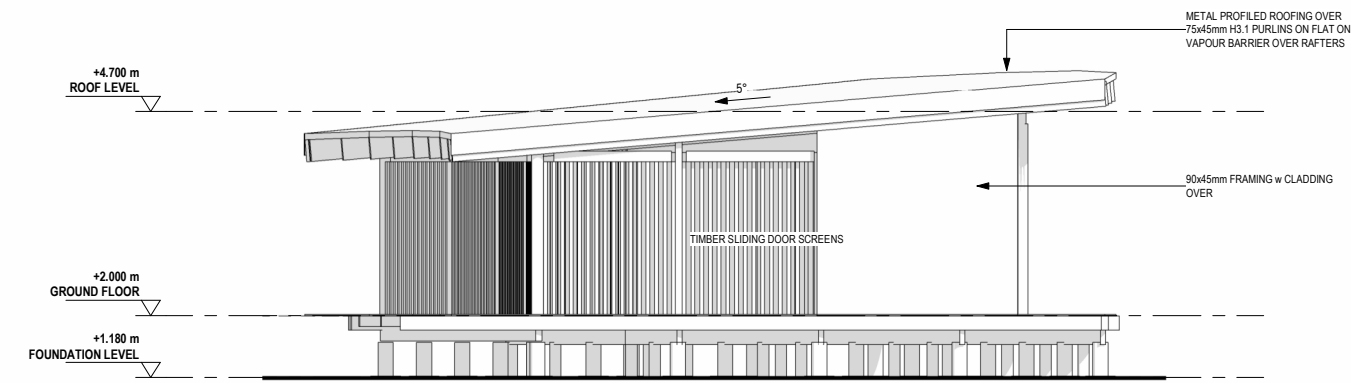


3 SIDE ELEVATION (TYP.)
SCALE: 1 : 50

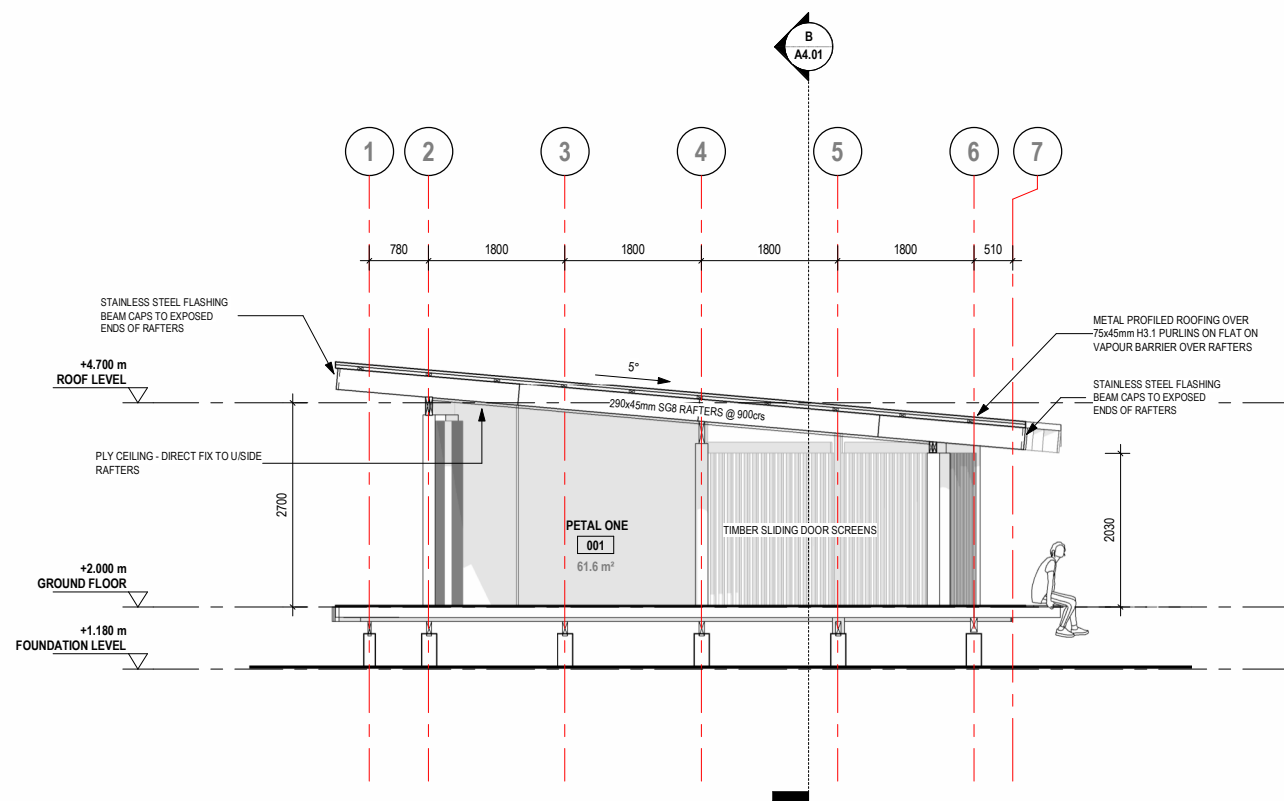

A
A2.00
SECTION A-A
SCALE: 1 : 50

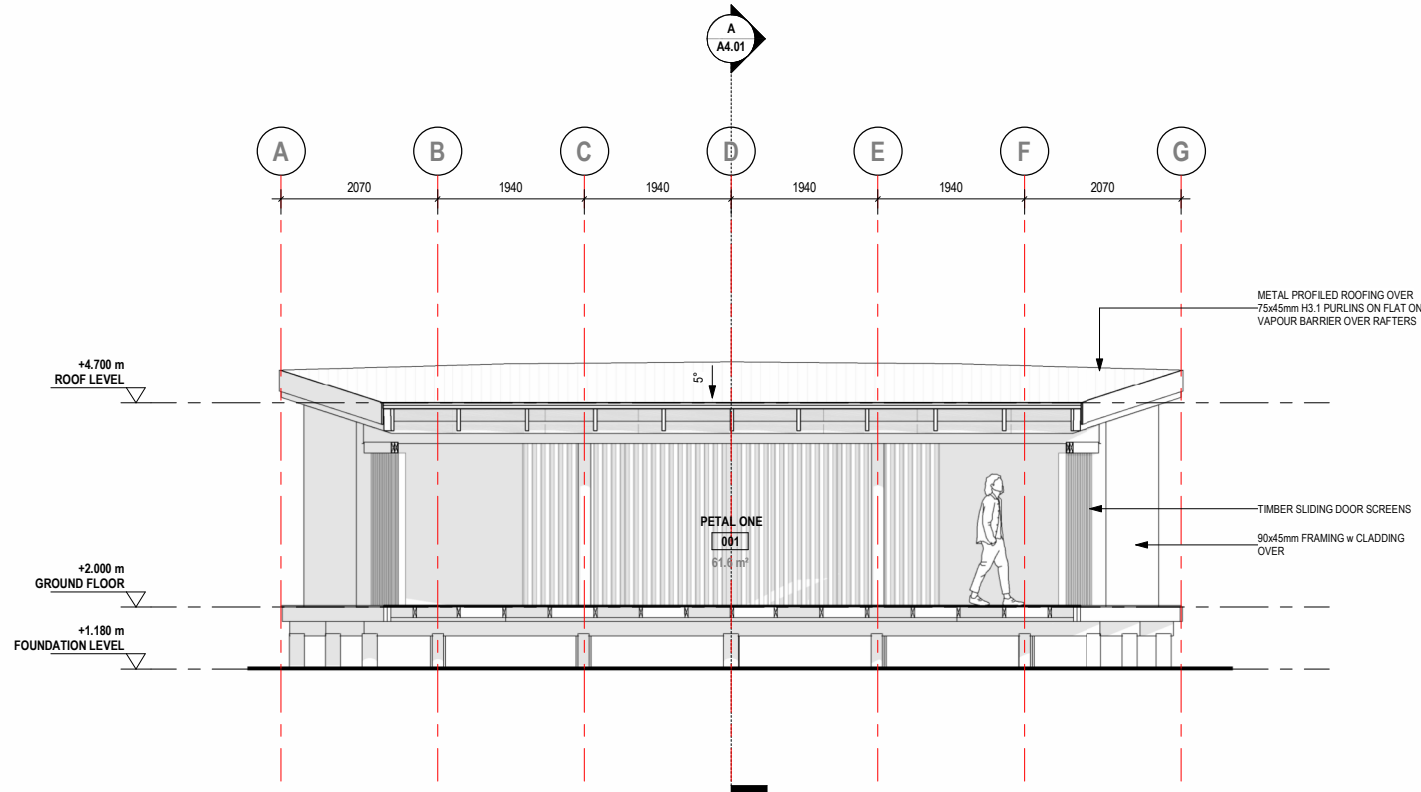

B
A2.00
SECTION B-B
SCALE: 1 : 50

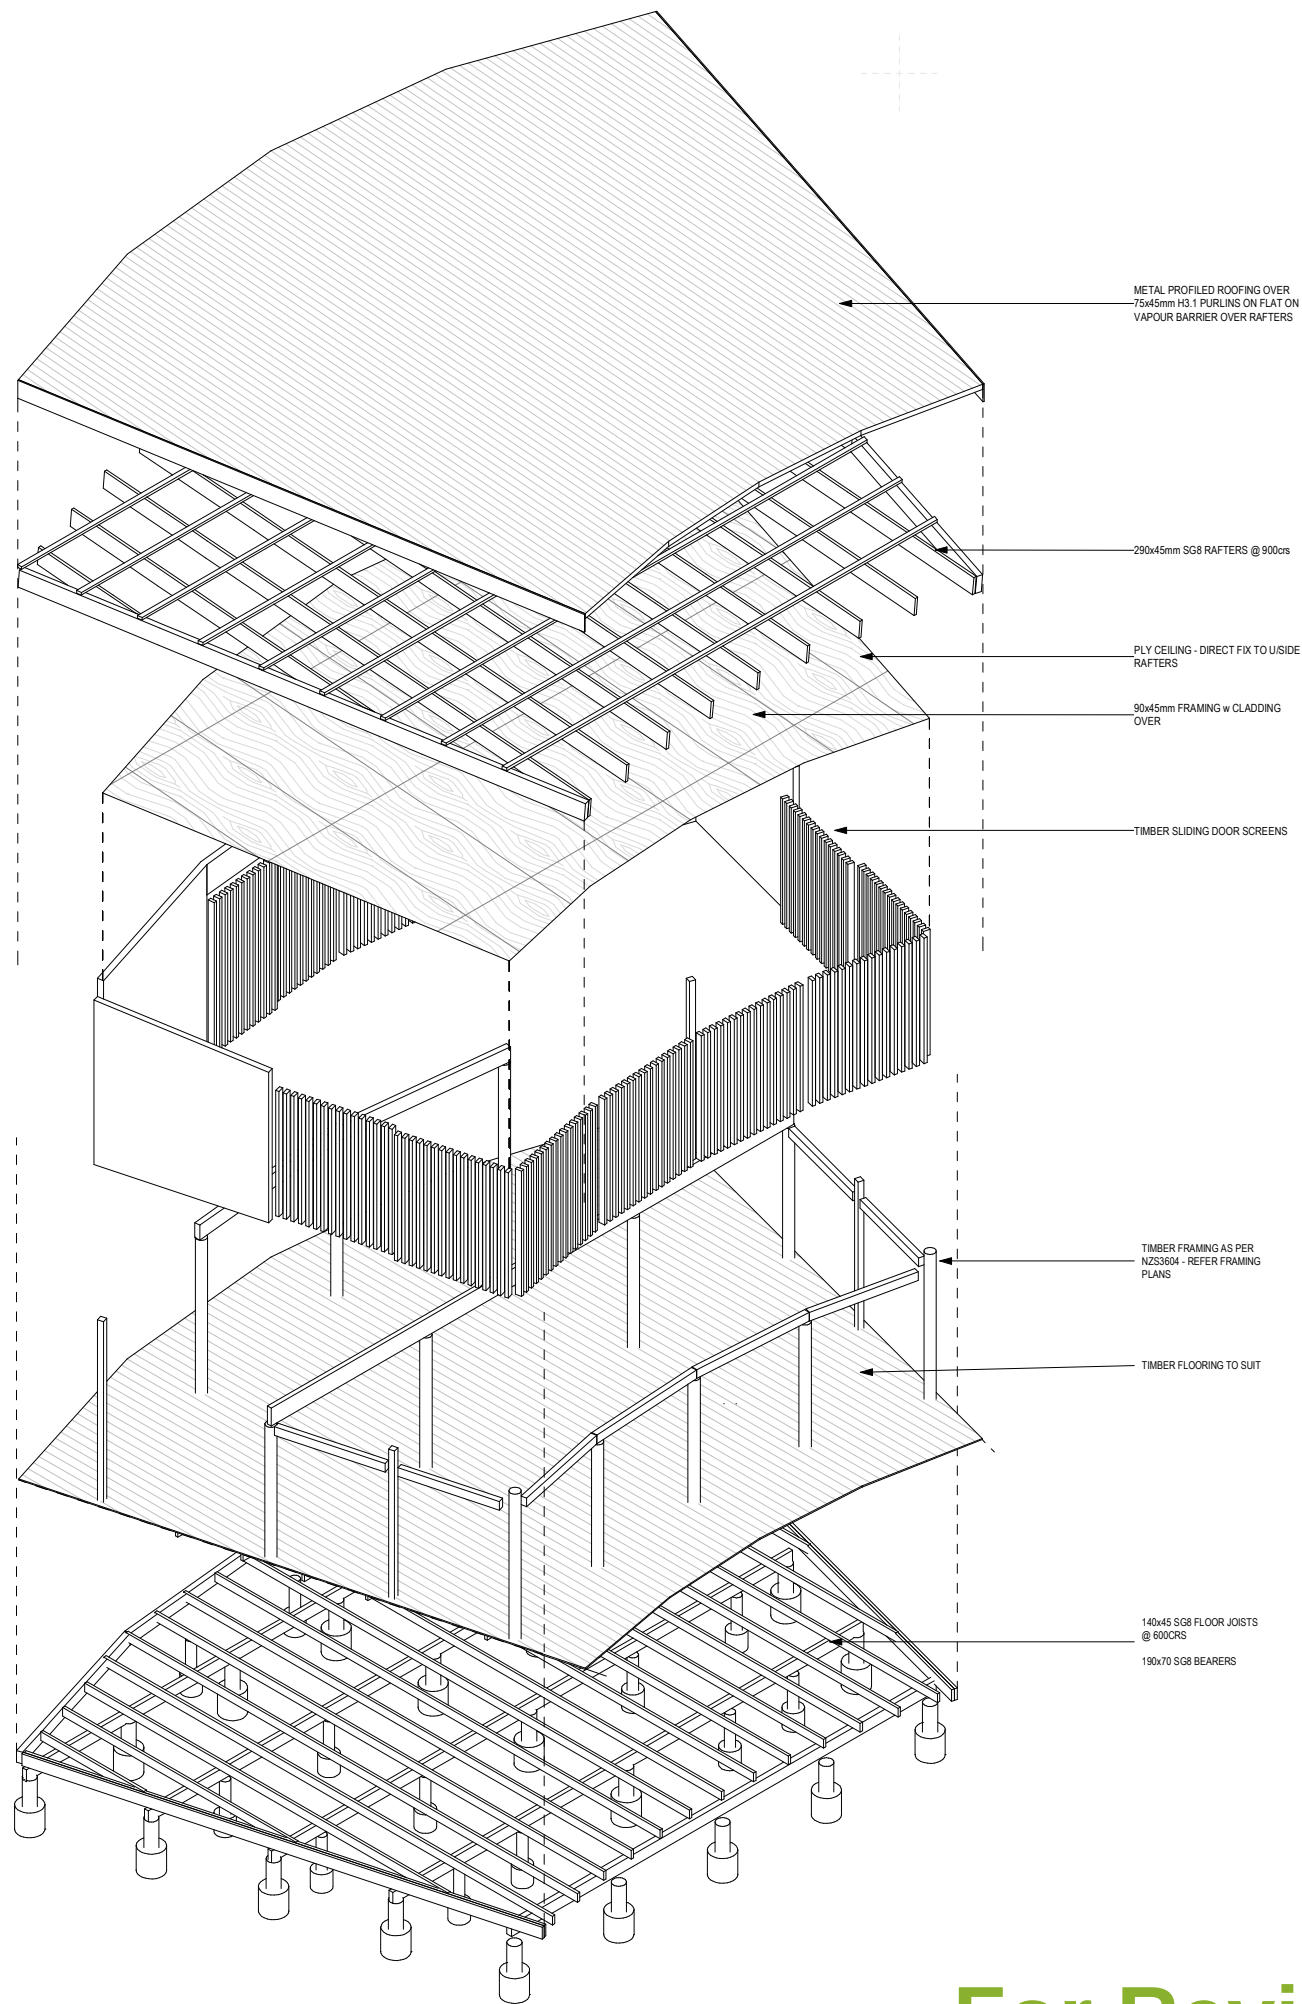

For Review
30/05/2026 11:24:01 pm